

EDGE

REVOLUTIONARY
CAR AUDIO



CAR AUDIO 2023



EDGE

PRODUCT RANGES

EDGE car audio was born from a desire to create cutting edge high performance car audio for the enjoyment of the many, not just the few. All EDGE products are built to deliver performance and value surpassed by no other brand.

Utilising our experienced team of UK engineers and designers, we define and interpret the market needs of modern car audio consumers. The range is constantly evolving with new product ideas introduced directly from customer feedback and demand. Be part of the revolution and join us at the cutting EDGE of car audio.

We are here for a good time not for a long time... Live it on the EDGE.



UNLIMITED

SERIES



When only the best, will do EDGE Unlimited is the only range for you. Built without compromise, this range uses the latest technology and design.


We are able to offer the biggest, strongest, loudest and most powerful products we have ever produced.

This range is not for the faint of heart and is used in competition winning installs around the world! When you want to be a winner choose EDGE Unlimited.

LEVEL 5

XTREME

SERIES

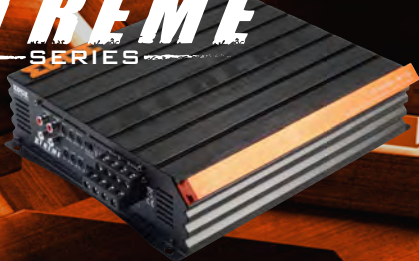

Want to be the loudest on the street?

Want to push the limits?

The Xtreme series combines some of the most powerful subwoofers, amplifiers and speakers into one range!

With brand new subwoofers and amplifiers we're truly living up to our premise of producing revolutionary car audio.

Want to be seen and heard?

Choose EDGE Xtreme.

LEVEL 4

STREET

SERIES



The Street series is where it all began!

In 2007 we began setting the streets on fire with the EDGE brand and the current incarnation of the Street series is stronger than ever.

In this range we start to push the boundaries of car audio with high levels of Pro audio, trunk rattling subwoofers, alongside component and coaxial speakers to suit all needs.

LEVEL 3

DBX

SERIES



When the DB series from EDGE just doesn't feed your need for extreme audio, the DBX series pushes the boundaries of the best value range on the market!

The DBX series offers an extreme take on our DB series.

These are high powered subwoofers, super loud Pro audio speakers, tweeters and a brilliant range of amplifiers to power them all.

When you want to push your budget, choose DBX.

LEVEL 2

DB

SERIES



The EDGE DB Series was designed to offer the best bang for buck products on the market. With subwoofers, coaxial speakers, Pro audio speakers and amplifiers, the DB series provides everything you need to be the loudest on the streets.

LEVEL 1

DB SERIES

DB SERIES COAXIAL SPEAKERS

EDGE's first range of coaxial speakers are here exhibited in the DB-series available in 5 and 6 inch variants.

The DB Series coaxial speakers feature a rigid IMPP woofer cone which helps to deliver robust and accurate midrange and bass response paired with a centrally mounted 20mm tweeter with a Neodymium motor to give enhanced high frequencies and vocal reproduction.

All the soft parts are mounted on a solid pressed Steel basket with enhanced ventilation, with the six inch featuring multi fit installation application.

When enhanced sound is required as an upgrade to your system, an EDGE coaxial is the product to pick. A coaxial will deliver full range sound from a single speaker and the composition of the DB series delivers impactful and dynamic sound.



EDGE DB SERIES



FEATURES

- 2 WAY COAXIAL SPEAKERS
- RUBBER SURROUND
- IMPP WOOFER CONE
- NEODYMIUM TWEETER MOTOR
- MULTI-FIT DESIGN ALLOWS FITMENT IN MOST VEHICLES
- SPADE TERMINAL



Model	EDB5-E1	EDB6-E1
Type	Coaxial	Coaxial
Configuration	2-way	2-way
Speaker Size	5.25" (130mm)	6.5" (165mm)
RMS Power	50 watts	60 watts
Peak Power	100 watts	120 watts
Frequency Response	80Hz - 20kHz	65Hz - 20kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2" (50mm)	2.1" (53mm)
Mounting Diameter	4.6" (117mm)	5.6" (141mm)
Grille	No	No
Recommended Amplifier	EDB80.2LITE-E2	EDB80.2LITE-E2

DB SERIES

DB SERIES COMPONENT TWEETER

The all-new EDGE DB Series tweeter provides the perfect tune up solution for your factory audio system that lacks high frequency output.

The DB Series tweeter features a Black Mylar dome diaphragm which delivers enhanced high frequencies and vocal reproduction and has a large Hexagon mesh grille for protection.

Installation is made simple with the option to flush mount or surface mount the tweeter and the wiring has a filter capacitor inline so there is no need to find space for an external crossover housing.

When enhanced sound is required as an upgrade to your system, an EDGE tweeter is the perfect place to start.

MYLAR
TWEETER

NEO MAG

HEX

EDGE
DB
SERIES



FEATURES

- COMPONENT TWEETER
- NEODYMIUM MOTOR
- BLACK MYLAR DOME DIAPHRAGM
- 20MM VOICE COIL
- FLUSH AND SURFACE MOUNTING OPTIONS
- INLINE PASSIVE CROSSOVER FILTER



Model	EDB1TN-E1
Type	Tweeter
Configuration	1-way
Speaker Size	1.8" (46mm)
RMS Power	25 watts
Peak Power	50 watts
Frequency Response	2Hz - 20kHz
Impedance	4 Ohms
Mounting Depth	0.7" (17mm)
Mounting Diameter	1.5" (39mm)
Recommended Amplifier	EDB80.2LITE-E0

DB SERIES

DB SERIES POWER AMPLIFIERS

Introducing the DB series amplifiers.

A range of entry level amps, ready to power the range of speakers and subwoofers featured in the DB series.

Our DB Series amps feature Class D topology meaning they more efficiently produce power and can be manufactured in a compact design for easier installation.

Available in single, 2 channel and 4 channel models, the amplifier range features active crossovers, bass boosts and remote gain controls for accurate amplifier configuration.

When power and space are important, utilise the DB series amps to power any DB series speaker, subwoofer or tweeter.



FEATURES

- 4 CHANNEL AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- EXTRUDED ALUMINIUM HEATSINK
- EFFICIENT CLASS D TOPOLOGY



Model	EDB500.1-E3	EDB1000.1-E3	EDB80.2LITE-E2	EDB80.4LITE-E2
Configuration	Monoblock	Monoblock	2 Channel	4 Channel
Dimensions (H x W x D)	46mm (1.8") x 185mm (7.3") x 205mm (8.1")	46mm (1.8") x 275mm (10.8") x 205mm (8.1")	58mm (2.3") x 178mm (7") x 230mm (9.1")	58mm (2.3") x 178mm (7") x 323mm (12.7")
RMS @ 4 Ohms	1 x 200w	1 x 400w	2 x 60w / 1 x 160w	4 x 60w / 2 x 160w
RMS @ 2 Ohms	1 x 350w	1 x 650w	2 x 80w	4 x 80w
RMS @ 1 Ohm	1 x 500w	1 x 1000w	N/A	N/A
Maximum Power	1000w	2000w	320w	640 w
Frequency Response	15Hz - 250Hz	15Hz - 250Hz	20Hz - 20kHz	20Hz - 20kHz
Crossover Type	LP / Subsonic	LP / Subsonic	HP/LP/FLAT	HP/LP/FLAT
Crossover Range	15hz - 250Hz	15hz - 250Hz	50Hz - 4kHz	50Hz - 4kHz
Topology	Class D	Class D	Class AB	Class AB

DB SERIES

DB SERIES PRO AUDIO TWEETER

The first introduction into Pro audio tweeters is in the DB series where we feature two Bullet tweeters, high frequencies at high volume.

The EDBPRO36T Pro tweeter is a Ferrite magnet based driver with an Aluminium diaphragm for high volume, high frequency sound. The asymmetrical horn design allows a less linear polar dispersion and a high level of efficiency, meaning the speaker will be loud where you choose it to be as positioning the speaker differently will yield different results.

Its cast Aluminium housing ensures a robust solid functional design with no added resonance to distort the sound and a high quality feel.

The EDBPRO36T bullet tweeter has been engineered to match our range of Pro audio speakers, so when paired together you get a full range, high volume Pro audio sound.



EDGE DB SERIES



FEATURES

- 3.8" PRO AUDIO BULLET TWEETER
- ALUMINIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE WITH ASYMMETRICAL POLAR DISPERSION
- SPADE TERMINAL
- HIGH SENSITIVITY



Model	EDBPRO36T-E1
Type	Pro audio Tweeter
Configuration	1-way
Speaker Size	3.8" (98mm)
RMS Power	80 watts
Peak Power	160 watts
Frequency Response	2kHz - 20kHz
Sensitivity	103dB
Impedance	4 Ohms
Mounting Depth	1.5" (39mm)
Mounting Diameter	3.1" (80mm)
Recommended Amplifier	EDB80.2LITE-E0

DB SERIES


DB SERIES PRO AUDIO TWEETER

The first introduction into Pro audio tweeters is in the DB series where we feature 2 Bullet tweeters, high frequencies at high volume.

The DB series Pro speakers are Ferrite magnet based drivers with Aluminium diaphragms for high volume, high frequency sound. The Horn designs allow a wide sound dispersion and a high level of efficiency meaning the speaker will be loud even at its minimum power input.

Its cast Aluminium housing ensures a robust solid functional design with no added resonance to distort the sound and a high quality feel.

Our DB series bullet tweeters have been engineered to match our range of Pro audio speakers, so when paired together you get a full range, high volume Pro audio sound.

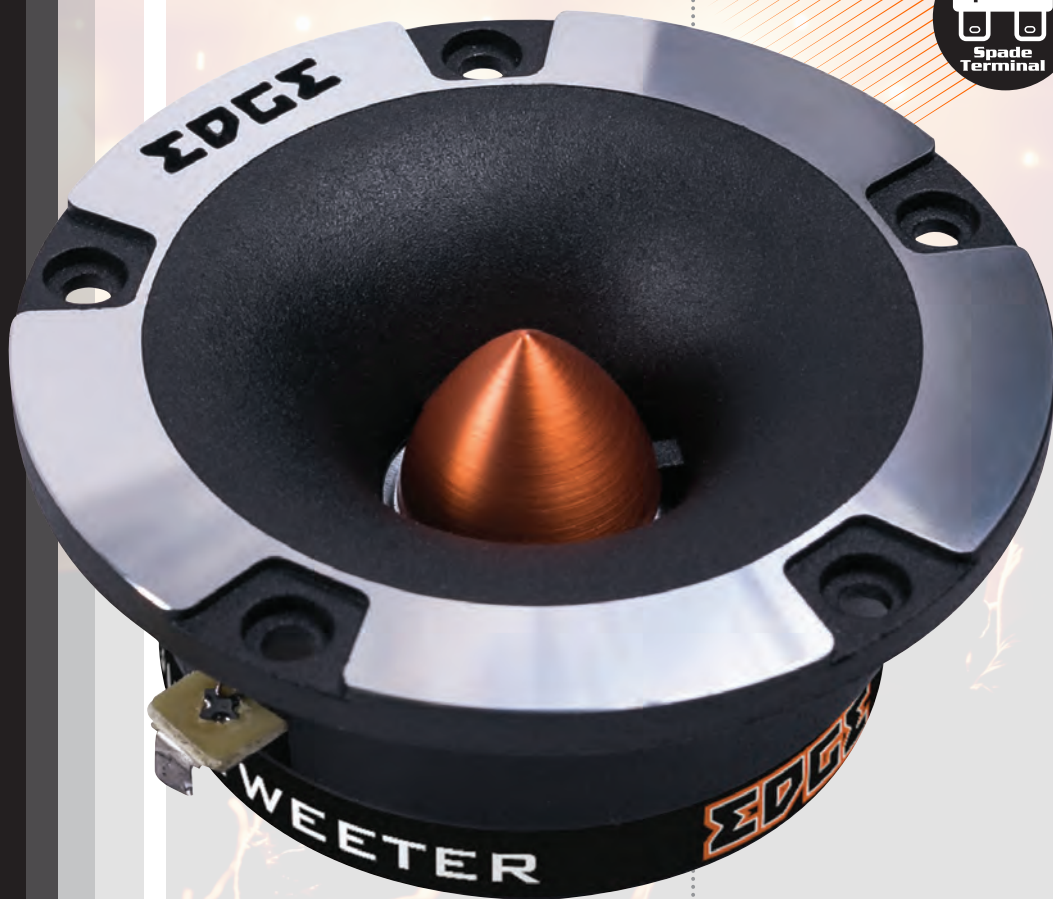

EDGE DB SERIES



FEATURES

- 3.7" PRO AUDIO BULLET TWEETER
- ALUMINIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- SPADE TERMINAL
- HIGH SENSITIVITY



Model	EDBPRO37T-E0
Type	Pro Audio Tweeter
Configuration	1-way
Speaker Size	3.7" (95mm)
RMS Power	75 watts
Peak Power	150 watts
Frequency Response	2kHz - 20kHz
Sensitivity	102dB
Impedance	4 Ohms
Mounting Depth	1.1" (28mm)
Mounting Diameter	2.9" (73mm)
Recommended Amplifier	EDB80.2LITE-E0

DB SERIES

DB SERIES PRO AUDIO MIDRANGE

Our all new DB Series features our first level of Pro audio speakers, some of the biggest and best selling in the world.

DB Series Pro audio speakers are our entry level into producing high volume midrange output across a variety of speaker sizes. To produce the high volume levels expected from Pro audio, EDGE DB series feature highly engineered components which have been specially designed.

Designed for extremely high efficiency and wide frequency response, including precision engineered voice coils and motors, revised composite cone and custom tooled "VORTEX" dust cap which deliver a more linear frequency response in the crucial midrange vocal region.

This results in a loud and market beating Pro speaker.



EDGE DB SERIES



FEATURES

- ALL NEW NON PRESSED COMPOSITE CONE
- CUSTOM TOOLED "VORTEX" DUSTCAP FOR IMPROVED MIDRANGE LINEARITY
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL FOR EASY CONNECTION
- EVA GASKET WITH CUSTOM EDGE BRANDING



Model	EDBPRO6-E3	EDBPRO8-E3	EDBPRO10-E3
Type	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way	1-way
Speaker Size	6.5" (165mm)	8" (200mm)	10" (257mm)
RMS Power	150 watts	175 watts	200 watts
Peak Power	300 watts	350 watts	400 watts
Sensitivity	98dB	98dB	99dB
Frequency Response	125Hz - 10.5kHz	100Hz - 9kHz	70Hz - 8.5kHz
Impedance	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	3" (75mm)	3.3" (85mm)	4.1" (103mm)
Mounting Diameter	5.7" (145mm)	7.3" (186mm)	9.3" (237mm)
Recommended Amplifier	EDB80.2LITE-E2	EDB80.2LITE-E2	EDB80.2LITE-E2

DB SERIES

DB SERIES SUBWOOFERS

The EDGE DB series features three subwoofers to cover a range of power and size applications.

The subwoofers in the DB Series feature hand-picked moving parts with a structurally engineered motor structure to create a balanced set of subwoofers which deliver precise bass reproduction as well as great levels of SPL output. Within the range we feature DB and DB Lite subwoofers with varying power abilities.

All woofers have undergone the same engineering practices and principles to produce an excellent entry level range of subwoofers.

Why add a subwoofer? In order to fully feel and experience the music, bringing the low bass that makes you feel the sound and feel fully immersed!



EDGE DB SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- DUAL POLY COTTON SPIDERS
- SPRING LOADED CONNECTORS
- Y35 FERRITE MAGNET
- DUAL 2 OHMS IMPEDANCE
- DOUBLE STITCHED SURROUND



Model	EDB12D2LITE-E0	EDB10D2-E0	EDB12D2-E0	EDB15D2-E0
Speaker Size	12" (323mm)	10" (274mm)	12" (323mm)	15" (392mm)
RMS / Peak Power	300W/600W	500W/1000W	600W/1200W	750W/1500W
Sensitivity	87dB	84dB	88dB	86dB
Frequency Response	25Hz - 850Hz	30Hz - 1kHz	25Hz - 850Hz	20Hz - 450Hz
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
Voice Coil	2" 4 layer	2" 4 layer	2" 4 layer	2" 4 layer
Magnet weight	40oz	55oz	55oz	75oz
Magnet dimensions	5.3" (137mm) x 0.8" (20mm)	5.7" (145mm) x 1" (25mm)	5.7" (145mm) x 1" (25mm)	6.1" (156mm) x 1.2" (30mm)
Mounting Depth	5.5" (140mm)	5.3" (135mm)	5.8" (146mm)	7.4" (189mm)
Mounting Diameter	11.1" (283mm)	9.2" (232mm)	10.8" (275mm)	13.7" (347mm)
Recommended Amplifier	EDB500.1-E9	EDB500.1-E9	EDB500.1-E9	EDB1000.1-E9

DB SERIES

DB SERIES PRO AUDIO ENCLOSURE

The DB Series Pro Box is a unique product from EDGE. It's a full range Pro Audio solution featuring 4 Pro Midrange drivers and 2 Pro bullet tweeters.

The DB Series Pro box was developed from a special requirement in Scandinavia. This design principle then became so popular we released it to the world. The Pro box is designed with a left and a right hand side, both ported and housing terminals for stereo sound. The port is calculated to help deliver higher mid-bass response and the

Quad 6.5 inch midrange and dual tweeters offer massive sound output from a small enclosure, perfect for anytime you want to be loud.

A solid MDF constructed enclosure with central bracing allows low resonance and keeps the playback clean and crystal clear.

Adding a Pro box is not for the feint of heart! When you want super loud crystal clear sound in or out of the vehicle this box delivers.

EDGE DB SERIES



FEATURES

- FULL RANGE PRO AUDIO ENCLOSURE
- 4 X EDBPRO6 MIDRANGE SPEAKERS
- 2 X EDPRO36BT TWEETERS
- DUAL PORTED ENCLOSURE
- DUAL INPUT WITH 2 X 2 OHM TERMINALS
- 1520 WATTS MAX POWER



Model	EDBPROBOX6-E2	EDBPROBOX8-E2
Tweeter	EDPRO36T	EDPRO36T
Midrange	EDBPRO6	EDBPRO8
Midwoofer	N/A	N/A
RMS Power	760 watts	860 watts
Peak Power	1520 watts	1720 watts
Impedance	Dual 2 Ohms	Dual 2 Ohms
Dimensions (H x W x D)	185mm (7.3") x 866mm (34.1") x 271mm (10.7")	198mm (7.8") x 866mm (34.1") x 271mm (10.7")
Frequency Response	120Hz - 20kHz	100Hz - 20kHz
Recommended Amplifier	EDA350.2	EDA350.2

DB SERIES STEALTH

DB SERIES BASS ENCLOSURES

The EDGE DB Series features our entry level 12CA enclosure along side a new revision to the world renowned EDB Series of boxes with a new "Stealth" design.

Our boxes all feature Turbo and Flared ports for smooth airflow which gives louder and more crisp bass. Paired with a solid enclosure construction the results are a winning solution.

This year see's component changes and alterations to the built in amplifier, delivering more depth and rumble than ever before.

When wanting to add that missing bass, the EDGE DB Series enclosures give an all in one solution packing a punch and delivering crisp, sharp and deep bass.

EDGE DB SERIES



FEATURES

- ALL NEW ACTIVE AMPLIFIER DELIVERS DEEPER BASS
- LOW AND HIGH LEVEL INPUT
- UP TO 1800 WATTS PEAK POWER
- UP TO 600 WATTS RMS POWER
- FLARED TURBOPORT REDUCES TURBULENCE



Model	EDB10A-E0	EDB12A-E0	EDB12TA-E0
Driver	ED510A	ED512A	ED512A x 2
RMS Power	250 watts	300 watts	600 watts
Peak Power	750 watts	900 watts	1800 watts
Impedance	4 Ohms	4 Ohms	4 Ohms
Dimensions (H x W x D)	300mm (11.8") x 365mm (14.4") x 400mm (15.7")	338mm (13.3") x 408mm (16.1") x 413mm (16.3")	338mm (13.3") x 740mm (29.1") x 413mm (16.3")
Configuration	4th order bass reflex	4th order bass reflex	4th order bass reflex
Amplifier	ED7200 (Active)	ED7200 (Active)	ED7300 (Active)



EDGE

EDGE

EDGE

EDB1210 1200 WATTS ACTIVE BASS REFLEX SUBWOOFER IN ENCLOSURE

CLASS AB POWERED BASS AMPLIFIER

EDGE

DBX SERIES

DBX SERIES COMPONENT TWEETER

The all-new EDGE DBX Series tweeter provides the perfect tune up solution for your factory audio system that lacks high frequency output.

The DBX Series tweeter features a Black Mylar dome diaphragm which delivers enhanced high frequencies and vocal reproduction.

Installation is made simple with the option to flush mount or surface mount the tweeter and the wiring has a filter capacitor inline so there is no need to find space for an external crossover housing.

When enhanced sound is required as an upgrade to your system, an EDGE tweeter is the perfect place to start.



EDGE DBX SERIES



FEATURES

- COMPONENT TWEETER
- NEODYMIUM MOTOR
- BLACK MYLAR DOME DIAPHRAGM
- 25MM VOICE COIL
- FLUSH AND SURFACE MOUNTING OPTIONS
- INLINE PASSIVE CROSSOVER FILTER



Model	EDBX1TN-E1
Type	Tweeter
Configuration	1-way
Speaker Size	1.8" (46mm)
RMS Power	50 watts
Peak Power	100 watts
Frequency Response	2Hz - 22kHz
Impedance	4 Ohms
Mounting Depth	0.7" (17mm)
Mounting Diameter	1.5" (39mm)
Recommended Amplifier	EDB80.2LITE-E0

DBX SERIES

DBX SERIES POWER AMPLIFIERS

2 and 4 channel stereo amplifiers feature in the DBX range and are perfect to power the DBX speakers, tweeters and subwoofers.

The DBX Series amplifiers have some fantastic unique features. The EDGE heatsink design has progressive fins promoting heat dispersion to keep the amps cool. The 2 and 4 channel class AB models feature an extended set of filters with the HPF up to 11kHz and the LPF to 4kHz giving much more control of your speakers than average amplifiers.

The all new DBX amplifiers feature internal fan cooling to keep temperatures low when the volume gets high.

When enhanced power for your in car audio is your drive, the DBX Series amps provide everything you need for high power high quality amplification.



EDGE DBX SERIES



FEATURES

- 2CH AND 4CH POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- INTERNAL FAN COOLING
- BASS BOOST CIRCUIT
- HIGH LEVEL INPUT WITH AUTO TURN ON FUNCTION



Model	EDBX100.4-E1	EDBX150.4-E1	EDBX200.4-E1	EDBX350.2-E1
Configuration	4 channel	4 channel	4 channel	2 channel
Dimensions (H x W x D)	58mm (2.3") x 280mm (11") x 224mm (8.8")	58mm (2.3") x 310mm (12.2") x 224mm (8.8")	58mm (2.3") x 350mm (13.8") x 224mm (8.8")	58mm (2.3") x 350mm (13.8") x 224mm (8.8")
RMS @ 4Ω Stereo	4 x 80 watts	4 x 100 watts	4 x 150 watts	2 x 250 watts
RMS @ 2Ω Stereo	4 x 100 watts	4 x 150 watts	4 x 200 watts	2 x 350 watts
RMS @ 4Ω Mono	2 x 200 watts	2 x 300 watts	2 x 400 watts	1 x 700 watts
RMS @ 2Ω Mono	N/A	N/A	N/A	N/A
RMS @ 1Ω Mono	N/A	N/A	N/A	N/A
Maximum Power	800 watts	1200 watts	1600 watts	1400 watts
Frequency Response	20Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz
Crossover Type	LP / HP / Flat	LP / HP / Flat	LP / HP / Flat	LP / HP / Flat
Crossover Range	30Hz - 250Hz	30Hz - 250Hz	30Hz - 250Hz	30Hz - 250Hz
Recommended Fuse	2 x 20A	2 x 25A	2 x 35A	2 x 30A
Topology	Class AB	Class AB	Class AB	Class AB



DBX SERIES

DBX SERIES POWER AMPLIFIERS

EDGE Introduces "The Big E" range of brand new Class D monoblock amplifiers to the DBX Series.

These amplifiers provide robust performance with 1Ω loading capable of delivering 1800 and 2200 watts RMS, ideal for high power and multiple subwoofer installations.

Our unique designed "Big E" heatsink has a high quality extruded Aluminium chassis with thick side fins for heat dissipation and our signature E engraved into the top for a subtle but very unique design.


The amplifiers come with solid die-cast 4awg power and ground terminals, dual speaker terminals and a bass remote for fine tuning adjustability. Paired with onboard adjustment for gain, bass boost, frequency and subsonic filters. These amps offer great levels of control.

Finally both models offer a signal output allowing you to simply add signal to another amp in your system.

Elegant, precise and powerful - The new DBX Series amplifiers from EDGE.




EDGE DBX SERIES

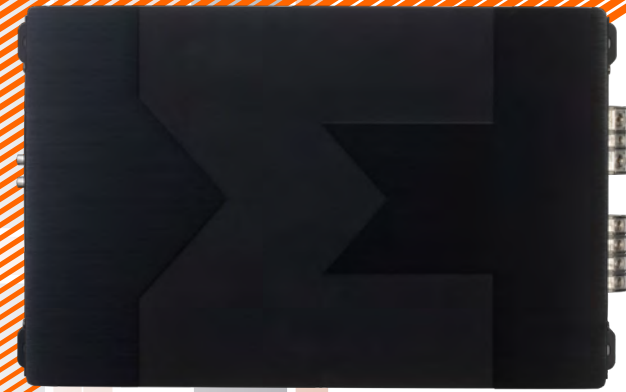

FEATURES

- CLASS D MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVER WITH LPF AND SUBSONIC FILTER
- PARAMETRIC BASS BOOST CIRCUIT WITH ADJUSTABLE FREQUENCY
- REMOTE LEVEL CONTROL
- RCA INPUT AND OUTPUT



Model	EDBX1800.1D-E1	EDBX2200.1D-E1
Configuration	Monoblock	Monoblock
Dimensions (H x W x D)	52mm (2") x 378mm (14.9") x 229mm (9")	52mm (2") x 458mm (18") x 229mm (9")
RMS @ 4Ω Mono	1 x 650 watts	1 x 850 watts
RMS @ 2Ω Mono	1 x 1200 watts	1 x 1600 watts
RMS @ 1Ω Mono	1 x 1800 watts	1 x 2200 watts
Maximum Power	3600 watts	4400 watts
Frequency Response	10Hz - 180Hz	10Hz - 180Hz
Crossover Type	LP / Subsonic	LP / Subsonic
Crossover Range	0Hz - 180Hz	0Hz - 180Hz
Recommended Fuse	180A (External fuse)	220A (External fuse)
Topology	Class D	Class D


DBX SERIES

DBX SERIES PRO AUDIO TWEETER

The EDBXPRO38T is the Pro audio tweeter featured in the DBX Series range, designed for loud high frequency reproduction.

Designed to produce the loud volume levels expected from Pro audio. The DBX Series tweeter has been engineered to have a very high level of efficiency, meaning it can very easily be very loud. We were able to do this by combining an Aluminium diaphragm with a 25mm Copper voice coil, paired with Ferrite magnet construction and a hand designed horn flange. These parts together create over 105dB of efficiency giving loud and clear high range frequency reproduction.

This high volume Bullet tweeter would be used in conjunction with any DBX Series Pro speaker when your requirements are HiFi beating volume and crisp clear sound.

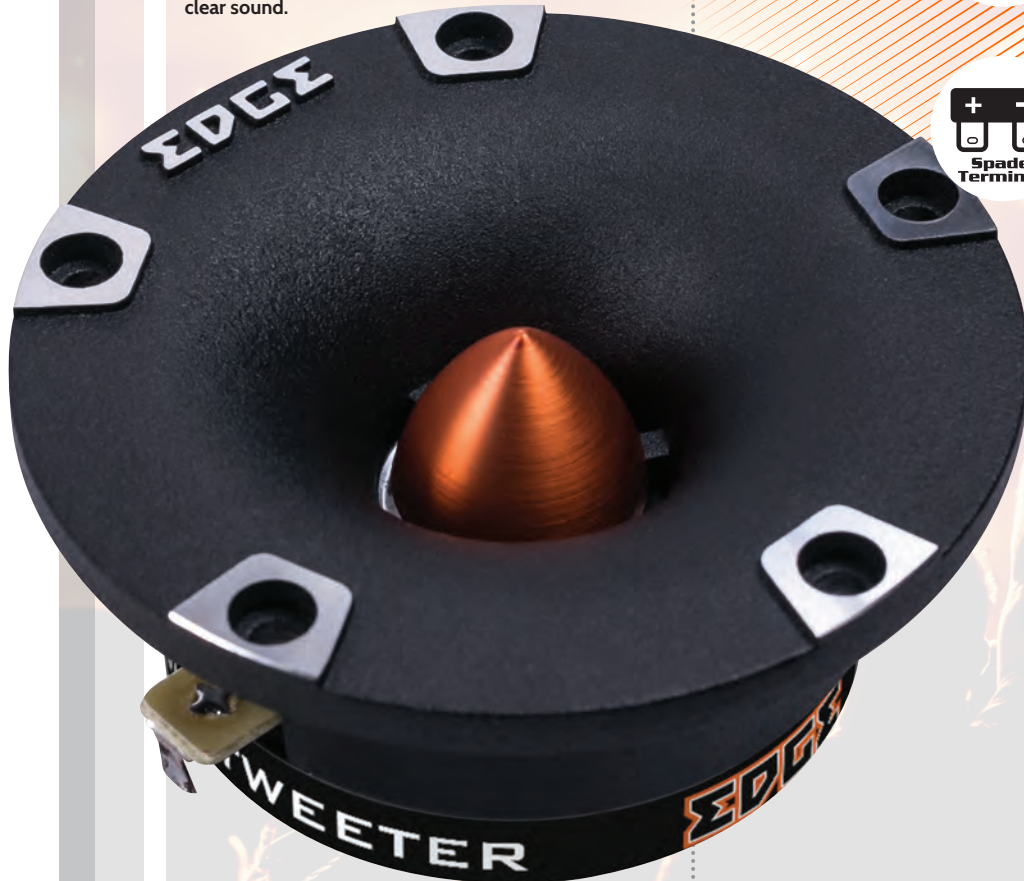


EDGE DBX SERIES



FEATURES

- PRO AUDIO BULLET TWEETER
- ALUMINIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- 105DB SENSITIVITY
- 25MM VOICE COIL



Model	EDBXPRO38T-E0
Type	Pro Audio Tweeter
Configuration	1-way
Speaker Size	3.7" (95mm)
RMS Power	75 watts
Peak Power	150 watts
Frequency Response	2kHz - 20kHz
Sensitivity	105dB
Impedance	4 Ohms
Mounting Depth	1.1" (28mm)
Mounting Diameter	2.85" (73mm)
Recommended Amplifier	EDA100.4-E7

DBX SERIES

DBX SERIES PRO AUDIO MIDRANGE

The DBX Series Pro speakers are designed for high volume sound reproduction.

Using all the experience and information we gathered from the development of the DB Series speakers, the DBX Series are an advancement in performance, with subtle engineering changes, increased magnet sizes, redeveloped voice coils with precision designed spiders and cones to produce loud efficient sound.

This wideband reproduces full range sound so it can be used even without a tweeter! The DBX series is our second range of speakers and shows technological advancements for added volume, efficiency and sound quality.

Used when a Pro sound and high volume is required the DBX Series speakers paired with DBX series tweeters deliver game changing performance.

EDGE DBX SERIES



FEATURES

- WIDEBAND FREQUENCY RESPONSE
- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL
- EVA GASKET



Model	EDBXPRO6W-E0	EDBXPRO69W-E9
Type	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way
Speaker Size	6.5" (165mm)	6" x 9" (160mm x 230mm)
RMS Power	150 watts	150 watts
Peak Power	300 watts	300 watts
Sensitivity	90dB	94dB
Frequency Response	100Hz - 20kHz	55Hz - 20kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2.4" (61mm)	3.6" (91mm)
Mounting Diameter	5.5" (140mm)	5.7" (145mm) x 8.5" (215mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7

DBX SERIES

DBX SERIES PRO AUDIO MIDRANGE

The DBX Series Pro speakers feature 6.5 and 8 inch models designed for high volume sound reproduction.

Using all the experience and information we gathered from the development of the DB Series speakers, the DBX Series are an advancement in performance, with subtle engineering changes, increased magnet sizes, redeveloped voice coils with precision designed spiders and cones to produce loud efficient sound.

This wideband reproduces full range sound so it can be used even without a tweeter! The DBX series is our second range of speakers and shows technological advancements for added volume, efficiency and sound quality.

Used when a Pro sound and high volume are required, the DBX Series speakers paired with DBX series tweeters deliver game changing performance.



EDGE DBX SERIES



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL
- EVA GASKET



Model	EDBXPRO6-E2	EDBXPRO8-E2
Type	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way
Speaker Size	6.5" (165mm)	8" (200mm)
RMS Power	150 watts	170 watts
Peak Power	300 watts	340 watts
Sensitivity	95dB	95dB
Frequency Response	160Hz - 10kHz	125Hz - 9kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	3.1" (78mm)	3.6" (91mm)
Mounting Diameter	5.7" (145mm)	7.4" (187mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7

DBX SERIES

DBX SERIES COMPACT BASS ENCLOSURE

Small, compact and powerful, the DBX series 10 inch enclosure is designed to add that warming bass in a small footprint.


Built for performance within a compact size, the DBX series enclosure features a cast Aluminium housing for solid rigidity without flex or resonance.

This ensures a precise and deep sound with accurate sound reproduction.

With features such as high and low level input, 0/180 degree phase adjustment and a gain level bass remote control.

The DBX series enclosure is easy to fit and delivers everything you need for additional bass.

When bass is required and space is limited the DBX series compact enclosure is the perfect product for your bass enhancement.

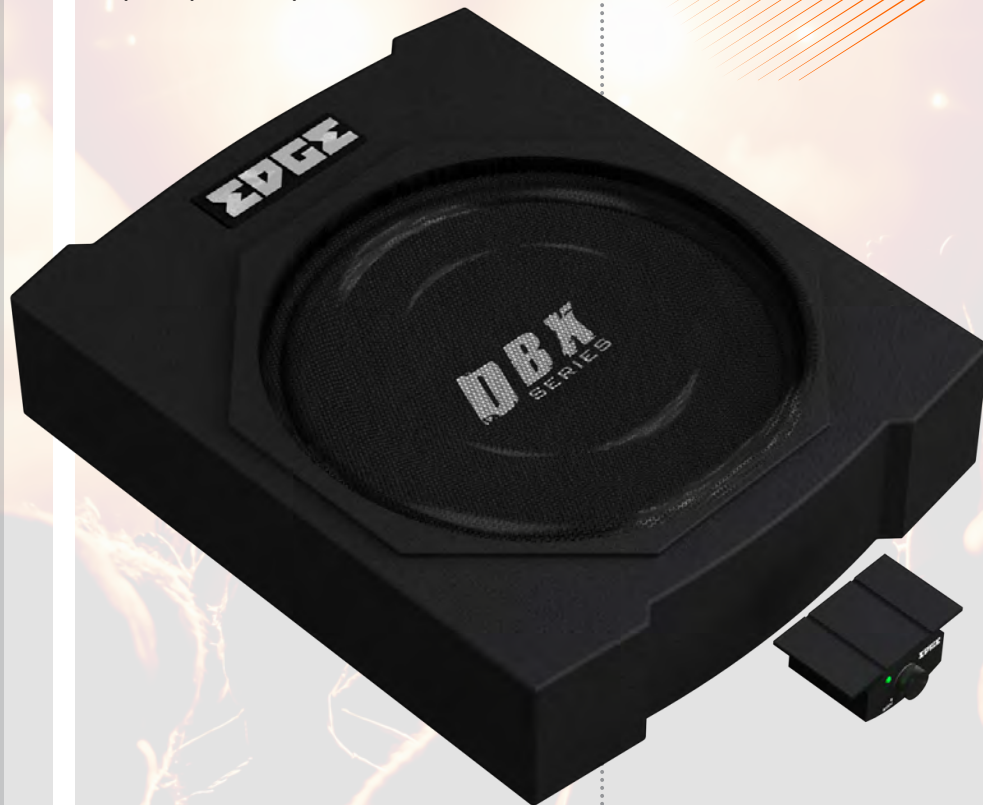

High Level Input



Remote Gain



Auto Sense



Active Enclosure

EDGE
DBX
SERIES



FEATURES

- CAST ALUMINIUM CHASSIS
- AUTO TURN ON CIRCUIT
- 0° / 180° PHASE SHIFT CONTROL
- REMOTE BASS CONTROL
- LOW LEVEL INPUT
- HIGH LEVEL INPUT
- PROTECTIVE MESH GRILLE



Model	EDBX10A-E0
Driver	EDBX10S
Type	Shallow active bass enclosure
RMS Power	180 watts
Peak Power	360 watts
Impedance	4 Ohms
Dimensions (H x W x D)	73mm (2.9") x 260mm (10.2") x 345mm (13.6")
Frequency response	350Hz - 20kHz
Configuration	2nd order acoustic suspension

DBX SERIES

DBX SERIES ACTIVE BASS ENCLOSURES

The all new DBX series bass enclosures deliver the highest level of technology ever seen at this price.

The MDF slot ported enclosure features a custom tooled amplifier heatsink that smooths the airflow to reduce turbulence and port noise.

The ultra efficient Class D amplifier features a powerful DSP front end that gives the user full control over the 8 band parametric EQ, subsonic filter, low pass filter, phase and time delay via the smartphone app that allows setup from the drivers seat.

The DBX series features three models from the compact 10" to the powerful 12" twin ensuring that there is an enclosure to match any vehicle and performance goals of even the most demanding user.



EDGE DBX SERIES



FEATURES

- CLASS D MONOBLOCK POWER AMPLIFIER WITH DSP
- AUTO TURN ON CIRCUIT
- LOW LEVEL INPUT
- HIGH LEVEL INPUT
- SLOT PORTED ENCLOSURE

VIA SMARTPHONE APP

- REMOTE BASS LEVEL CONTROL
- PHASE LPF SUBSONIC TIME DELAY PARAMETRIC EQ CONTROL



Model	EDBX10A-E2	EDBX12A-E2	EDBX12TA-E2
Driver	EDBX10	EDBX12	2 x EDBX12
Type	Slot ported enclosure	Slot ported enclosure	Slot ported enclosure
RMS Power	300 watts	400 watts	800 watts
Peak Power	900 watts	1200 watts	1200 watts
Impedance	4 Ohms	4 Ohms	4 Ohms
Height	335mm (13.2")	375mm (14.8")	375mm (14.8")
Width	500mm (19.7")	500mm (19.7")	900mm (35.4")
Depth	288mm (11.3")	298mm (11.7")	298mm (11.7")
Frequency response	30Hz - 250Hz	25Hz - 250Hz	25Hz - 250Hz
Configuration	Bass reflex	Bass reflex	Bass reflex

DBX SERIES

DBX SERIES SUBWOOFERS

The DBX Series Subwoofers are available in 12 and 15 inch models.

This new subwoofer range features our new unique 2 piece dustcap which is included across our entire range. The 2pc cap gives added rigidity to the cone for stronger tighter bass. This subwoofer has a pressed Steel torsion basket and double stacked high quality Ferrite magnets for a competent level of motor force. Paired with the motor structure we use a 2.5" inch voice coil and a non-pressed paper cone and high roll surround. Due to this we are able to produce an efficient, strong, powerful and accurate bass reproduction.

The DBX subwoofers give you that added depth, volume and bass that is missing from a standard car audio system. Tailored to give high performance at a competitive price.



EDGE DBX SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- 100 OZ DUAL STACKED MAGNET
- SPRING LOADED CONNECTORS
- Y35 FERRITE MAGNET
- DUAL 2 OHM IMPEDANCE
- DOUBLE STITCHED SURROUND



Model	EDBX12D2-E0	EDBX15D2-E0
Cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - dual stitched	Big roll foam - dual stitched
Dustcap	Custom tooled IMPP	Custom tooled IMPP
Voice Coil Former	2.5" black Aluminium	2.5" black Aluminium
Spider	1 layer black PC	2 layer
Gasket	Rubber	Rubber
Top Plate	10mm Black anodized	10mm Black anodized
T-Yoke	10mm Black anodized flat	10mm Black anodized flat
Terminal / Wire	Spring loaded connectors	Spring loaded connectors
Impedance	Dual 2Ω	Dual 2Ω
RMS Power	750 watts	900 watts
Peak Power	1500 watts	1800 watts
Magnet	156mm x 80mm x 20mm 2pcs	156mm x 80mm x 20mm 2pcs

STREET SERIES

STREET SERIES SILK DOME TWEETER

SQL Tweeter - Designed for refined sound, the EDS SQL 1 Inch tweeter was developed for those who love high fidelity sound, accurate and smooth high frequency sound reproduction and the warmth of a silk dome. The unique horn design allows for a wide bandwidth to give a perfect pairing with any EDGE midrange.

SPL Tweeter - For those looking for accurate, crisp sound our Street series SPL tweeter offers just that, featuring a Titanium dome the SPL tweeter produces high volume sound with a crisp, sharp, deadly accurate response which paired with any EDGE Pro mid can be an awesome combination.



EDGE STREET SERIES



FEATURES

- SILK DOME AND TITANIUM DIAPHRAGM VERSIONS
- SILK DOME DIAPHRAGM DELIVERS SMOOTH VOCAL REPRODUCTION AND EXTENDED HIGH FREQUENCY RESPONSE
- TITANIUM DOME DIAPHRAGM DELIVERS POWERFUL HIGH FREQUENCY RESPONSE WITH BOOSTED MIDRANGE OUTPUT
- HEXAGON MESH GRILLE
- ALLOY CHASSIS
- NEODYMIUM MAGNET
- HIGH SENSITIVITY



Model	EDS1SQTN-E1	EDS1SPLTN-E1
Type	Silk dome tweeter	Titanium dome tweeter
Configuration	1-way	1-way
Speaker Size	1.9" (48mm)	1.9" (48mm)
RMS Power	100 watts	120 watts
Peak Power	200 watts	240 watts
Sensitivity	96dB	98dB
Frequency Response	1.2kHz - 20kHz	1.2kHz - 20kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	0.9" (23mm)	0.9" (23mm)
Mounting Diameter	1.7" (43mm)	1.7" (43mm)
Recommended Amplifier	EDA100.4-E7	EDA100.4-E7

STREET SERIES

STREET SERIES POWER AMPLIFIERS

Within the Street Series, two brand new full range, full bridge amplifiers in two channel and monoblock have been introduced.

The Street Series amplifiers are new to the EDGE range. These amps feature Class D topology but use a full bridge method of power delivery.

This is a more efficient method of converting DC power from your battery to AC output for your speakers. Full bridge technology allows us to generate large power in a tiny footprint.

The custom tooled heatsink was designed with over engineered fins for excellent heat dissipation ensuring the amp works well and cools correctly.

All models have built in active crossovers and bass boost and can be used to power subwoofers, midrange drivers or tweeters.

Compact and powerful, the perfect amplifier upgrade for those wanting more than the norm.



FEATURES

- 2CH AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- ULTRA EFFICIENT CLASS D TOPOLOGY
- WIDEBAND FREQUENCY RESPONSE UP TO 20KHZ
- FULL BRIDGE TECHNOLOGY
- COMPACT FOOTPRINT



Model	EDS500.2FD-E3	EDS3000.1FD-E3
Configuration	2 channel	Monoblock
Dimensions (H x W x D)	63mm (2.5") x 125mm (6.9") x 232mm (9.1")	63mm (2.5") x 184mm (7.2") x 232mm (9.1")
RMS @ 4Ω Stereo	2 x 225 watts	N/A
RMS @ 2Ω Stereo	2 x 325 watts	N/A
RMS @ 1Ω Stereo	2 x 525 watts	N/A
RMS @ 4Ω Mono	1 x 650 watts	1 x 1100 watts
RMS @ 2Ω Mono	1 x 1050 watts	1 x 2050 watts
RMS @ 1Ω Mono	N/A	1 x 3300 watts
Maximum Power	2100 watts	6600 watts
Frequency Response	20Hz - 20kHz	15Hz - 20kHz
Crossover Type	LP / HP	LP / HP
Crossover Range	15Hz - 15kHz	15Hz - 20kHz
Recommended Fuse	90A External Fuse	250A External Fuse
Topology	Class D	Class D

STREET SERIES

STREET SERIES PRO AUDIO TWEETERS

The Street Series from EDGE is where our first Compression Horn tweeter is introduced.

Featuring a high quality Neodymium magnet structure the EDPRO22T has wonderful control over the voice coil.

The advantage of this style horn tweeter over the more traditional flat bullet tweeter is the extended horn-length which increases the sound quality and clarity along side a boost in the frequency range it can play.

Its compact footprint makes it easy to install if space is limited. This tweeter uses high efficiency to deliver high volume high frequency sound reproduction with wonderful clarity and accuracy.

Just like with any EDGE Pro line, this product is perfect for installing when HiFi sound is not enough. Pairing with any Street pro midrange will give you an awesome full range combination.



EDGE
STREET
SERIES



FEATURES

- PRO AUDIO COMPRESSION DRIVERS
- TITANIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- FERRO-FLUID VOICE COIL COOLING
- SCREW TERMINAL



Model	EDPRO22T-E4
Type	Pro audio Tweeter
Configuration	1-way
Speaker Size	2.2" (58mm)
RMS Power	100 watts
Peak Power	300 watts
Frequency Response	2kHz - 20kHz
Sensitivity	105dB
Impedance	4 Ohms
Mounting Depth	1.3" (39mm)
Mounting Diameter	1.7" (43mm)
Recommended Amplifier	EDA100.4-E7

STREET SERIES

STREET SERIES PRO AUDIO MIDRANGE

We developed the Street Series, with an increased magnet structure and larger voice coil. Street Series have an increased power capability as well as a very wideband frequency response making them ideal for vocal reproduction at high volume levels.

By using high grade Ferrite magnets, Copper voice coils and precision engineered soft parts we are able to produce high volume wideband response with real clarity and accuracy.



EDGE
STREET
SERIES



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL
- EVA GASKET



Model	EDSPRO6-E1	EDSPRO8-E1
Type	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way
Speaker Size	6.5" (165mm)	8" (200mm)
RMS Power	200 watts	225 watts
Peak Power	400 watts	450 watts
Sensitivity	96dB	98dB
Frequency Response	90Hz - 20kHz	80Hz - 20kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2.5" (64mm)	3.3" (85mm)
Mounting Diameter	5.5" (140mm)	7.3" (183mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7

STREET SERIES

STREET SERIES SUBWOOFERS

Introducing the trunk thumping Street Series subwoofers from EDGE.

The Street Series subwoofers have been designed from the ground up to produce awesome musical bass. By using double stacked magnets to generate large magnetic force we are able to control the subwoofer with pin point accuracy while maintaining a high level of excursion and SPL.

Available currently in 12, 15 and 18 inch variants. Using polycotton spiders, non-pressed paper cones and stitched tinsel leads, we are able to create a high quality product that produces accurate loud bass.

For anyone looking for hard hitting street bass look no further than our Street Series subs.



EDGE STREET SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- BLACK POLY COTTON SPIDERS
- DUAL Y35 FERRITE MAGNETS
- 3" BLACK ALUMINIUM VOICE COIL



Model	EDP122SPL-E3	EDS12D2-E0	EDS15D2-E0	EDS18D2-E0
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched
Dustcap	2 part IMPP	2 part IMPP	2 part IMPP	Carbon fibre
Voice Coil	38mm Copper winding	38mm Copper winding	45mm Copper winding	45mm Copper winding
Spider	2pcs Black PC	2pcs Black PC	2pcs Black PC	4pcs Black PC
Gasket	Rubber	Rubber	Rubber	Rubber
Top Plate	10mm Black anodized	10mm Black anodized	12mm Black anodized	12mm Black anodized
T-Yoke	8mm Bumped	8mm Bumped	10mm Bumped	10mm Bumped
Terminal / Wire	Terminal	Terminal	Terminal	Terminal
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
RMS Power	1500 watts	1400 watts	1600 watts	1800 watts
Peak Power	4500 watts	2800 watts	3200 watts	3600 watts
Magnet	170mm x 22mm 2pcs 132oz	170mm x 20mm 2pcs 120oz	190mm x 20mm 2pcs 150oz	190mm x 20mm 2pcs 150oz

XTREME SERIES

XTREME SERIES PRO AUDIO DRIVER

The Xtreme Series from EDGE features a new style product not seen elsewhere in the range.

This high frequency driver is something different to a traditional compression tweeter. The driver uses a high power motor to drive the large Titanium diaphragm and voice coils with precision. This is then paired with a massive 6.5 inch flared horn design. The large flared horn allows the pro driver to play significantly lower than a tweeter.

The EDXPRO65T delivers frequencies as low as 1000Hz which allows more of the directional sound to come from one location.

The horn itself also allows the sound to be smoother as it has a more progressive dispersion.

This gives increased clarity, efficiency and volume to the sound.

Adding an Xtreme series Horn driver is for those wanting to take Pro audio to the next level producing concert level volume and clarity from on the road.



EDGE

**XTREME
SERIES**



FEATURES

- PRO AUDIO COMPRESSION DRIVER
- TITANIUM DIAPHRAGM
- ASYMMETRIC FLARED HORN DESIGN
- FERRO-FLUID VOICE COIL COOLING
- SPRING TERMINAL



Model	EDXPRO65T-E3
Type	Compression Driver
Configuration	1-way
Speaker Size	6.5" (165mm)
RMS Power	80 watts
Peak Power	240 watts
Frequency Response	1.2kHz - 20kHz
Sensitivity	105dB
Impedance	6.6 Ohms
Mounting Depth	3.7" (95mm)
Mounting Diameter	5.3" (135mm)
Recommended Amplifier	EDA100.4-E7

XTREME SERIES

XTREME SERIES PRO AUDIO DRIVER

The all new Xtreme series Pro drivers from EDGE have been designed from the ground up to be different.

The square cone has 22% greater surface area than the equivalent sized round speaker which results in higher SPL levels and the concentrically mounted PEI high frequency driver delivers output up to 20kHz.

The oversized motor is designed using Finite Element Method Magnetics (FEMM) to deliver maximum magnetic force to the Kapton voice coil.

A dual roll cloth surround and composite paper cone deliver high fidelity sound at incredible volume levels.

If you want to play loud and clean, the Xtreme series Pro midrange drivers from EDGE have got you covered.



EDGE

XTREME SERIES



FEATURES

- UNIQUE SQUARE CONCENTRIC PRO AUDIO DRIVER
- CONCENTRICALLY MOUNTED PEI DOME HIGH FREQUENCY DRIVER
- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND



Model	EDXPRO6QB-E2
Type	Pro Audio Driver
Sound profile	Full Range
Speaker Size	6.5" (165mm)
RMS Power	300 watts
Peak Power	600 watts
Sensitivity	96dB
Frequency Response	80Hz - 20kHz
Impedance	4 Ohms
Mounting Depth	2.6" (67mm)
Mounting Diameter	5.6" (143mm)
Recommended Amplifier	EDA350.2-E7

XTREME SERIES

XTREME SERIES PRO AUDIO MIDRANGE

The all new Xtreme series Pro midrange drivers from EDGE have been designed from the ground up to deliver a loud and detailed sound.

The oversized motor is designed using Finite Element Method Magnetics (FEMM) to deliver maximum magnetic force to the Kapton voice coil.

A dual roll cloth surround and composite paper cone delivers high fidelity sound at incredible volume levels.

If you want to play loud and clean, the Xtreme series Pro midrange drivers from EDGE have got you covered.



EDGE

**XTREME
SERIES**



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPRING TERMINAL
- EVA GASKET



Model	EDXPRO6-E1	EDXPRO8-E1
Type	Pro Audio Midrange	Pro Audio Midrange
Sound profile	Balanced Response	Balanced Response
Speaker Size	6.5" (165mm)	8" (200mm)
RMS Power	300 watts	350 watts
Peak Power	600 watts	700 watts
Sensitivity	99dB	98dB
Frequency Response	80Hz - 10kHz	65Hz - 10kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2.6" (65mm)	3" (76mm)
Mounting Diameter	5.6" (143mm)	7.2" (183mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7



XTREME SERIES

XTREME SERIES POWER AMPLIFIERS

The Xtreme Series from EDGE offers the big brothers to the new Street Series. Full bridge, full range class D amplifiers in single channel and stereo applications.

The Xtreme Series amplifiers are new to the EDGE range and feature Class D topology but use a full bridge method of power delivery.

This is a more efficient method of converting DC power from your battery to AC output for your speakers. Full bridge technology allows us to generate large power in a tiny footprint.

The custom tooled heatsink was designed with over engineered fins for excellent heat dissipation, ensuring the amp works well and cools correctly.

All models have built in active crossovers and bass boost and can be used to power subwoofers, midrange drivers or tweeters.

To power Xtreme Series speakers and subwoofers you need Xtreme amplifiers.

The 5000 watt single channel, 1800 watts per channel 2 channel and 800 watts per channel 4 channel amplifiers will certainly do that.



FEATURES

- 2CH 4CH AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- ULTRA EFFICIENT CLASS D TOPOLOGY
- WIDEBAND FREQUENCY RESPONSE UP TO 20KHZ
- FULL BRIDGE TECHNOLOGY
- COMPACT FOOTPRINT



Model	EDX1800.2FD-E0	EDX800.4FD-E0	EDX5000.1FD-E0
Configuration	2 channel	4 channel	Monoblock
Dimensions (H x W x D)	63mm (2.5") x 264mm (10.4") x 232mm (9.1")	63mm (2.5") x 264mm (10.4") x 232mm (9.1")	63mm (2.5") x 264mm (10.4") x 232mm (9.1")
RMS @ 4Ω Stereo	2 x 850 watts	4 x 310 watts	N/A
RMS @ 2Ω Stereo	2 x 1250 watts	4 x 500 watts	N/A
RMS @ 1Ω Stereo	2 x 1800 watts	4 x 800 watts	N/A
RMS @ 4Ω Mono	1 x 2500 watts	2 x 1000 watts	1 x 1800 watts
RMS @ 2Ω Mono	1 x 3600 watts	2 x 1600 watts	1 x 2500 watts
RMS @ 1Ω Mono	N/A	N/A	1 x 5000 watts
Maximum Power	7200 watts	6400 watts	10,000 watts
Frequency Response	20Hz - 20kHz	20Hz - 20kHz	15Hz - 20kHz
Crossover Type	LP / HP	LP / HP / FLAT	LP / HP
Crossover Range	15Hz - 15kHz	15Hz - 6kHz	15Hz - 20Hz
Recommended Fuse	300A External Fuse	300A External Fuse	350A External Fuse
Topology	Class D	Class D	Class D

XTREME SERIES

XTREME SERIES POWER AMPLIFIERS

The Xtreme Series from EDGE Audio Presents an all new competition SPL amplifier.


Ultra efficient Class D topology maximises available battery power and minimises losses ensuring maximum power delivery to the subwoofers.

18v DC input stability allowing the user to maximise the power output from the non-regulated power supply. Dual OAWG power input terminals allow huge cable to be connected between the vehicles power supply and the amplifier PCB.

Amplifier strapping circuit allows 2 amplifiers to be connected together to deliver their combined output power into a single channel delivering up to 11,800 watts RMS.

Parametric bass boost allows the user to boost the frequency of their choice. Low pass and subsonic crossover filters.


12dB per active on-board active crossover network, remote gain control, audio pass through RCA output and full CE certification round out the already impressive specifications list.

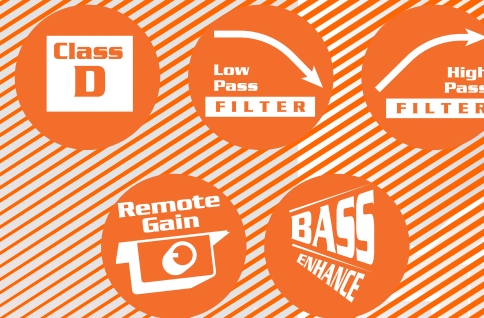

EDGE XTREME SERIES

FEATURES

- ULTRA CLASS D MONOBLOCK AMPLIFIER WITH HIGH EFFICIENCY UP TO 92%
- DUAL OAWG POWER INPUT TERMINALS ALLOW HUGE GAUGE CABLE TO BE CONNECTED
- MOSFET OUTPUT STAGE DELIVERS HIGH POWER AND RELIABILITY
- 10HM LOW IMPEDANCE DRIVE
- PARAMETRIC BASS BOOST ALLOWS UP TO 120DB OF BOOST AT ANY FREQUENCY BETWEEN 30HZ AND 90HZ
- AMPLIFIER STRAPPING ALLOWS 2 IDENTICAL AMPLIFIERS TO BE CONNECTED TO DELIVER THE FULL POWER THROUGH A SINGLE CHANNEL
- LEVEL REMOTE ALLOWS EASY ADJUSTMENT OF LEVEL FROM THE FRONT OF THE VEHICLE
- FULL EMI AND CE APPROVAL

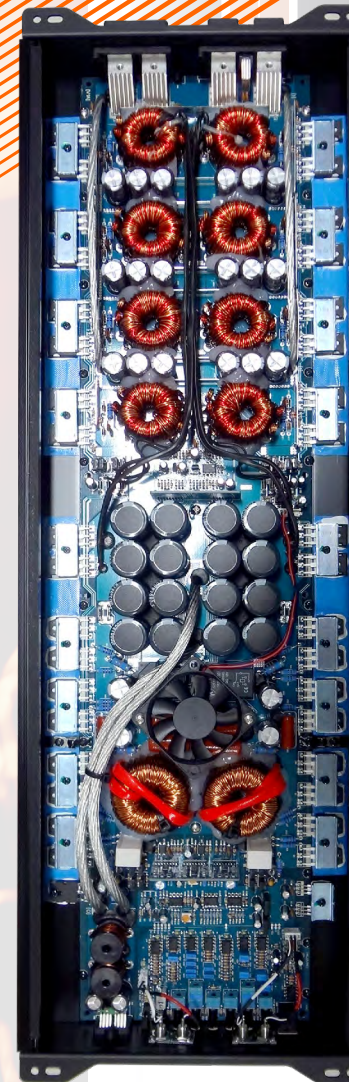

Model	EDX5000.1D-E1
Configuration	Monoblock
Dimensions (H x W x D)	59mm (2.3") x 250mm (9.8") x 650mm (25.6")
RMS @ 4Ω 14.4v 1% THD	1 x 1580 watts
RMS @ 2Ω 14.4v 1% THD	1 x 3000 watts
RMS @ 1Ω 14.4v 1% THD	1 x 5500 watts
RMS @ 1Ω 16v 1% THD	1 x 5700 watts
RMS @ 1Ω 18v 1% THD	1 x 5800 watts
Maximum Power	11,000 watts
Frequency Response	10Hz - 350Hz
Crossover Type	LP / Subsonic
Crossover Range	10Hz - 250Hz
Input Sensitivity	200mv - 8v
Topology	Ultra Class D



XTREME SERIES

XTREME SERIES SUBWOOFERS

Introducing the Xtreme Series subwoofers from EDGE. Perfect for those looking for deep, high power, street thumping bass. Multiple models and sizes available complete with a brand new range.

Our Xtreme Series subwoofers were designed with a combination of street bass and competition bass in mind. All the subwoofers feature massive triple stacked motor structures across 3 basket types all constructed from cast Aluminium for strength and rigidity. Paired with Polycotton spiders, stitched tinsel leads, non pressed paper cones and 3 inch voice coils we have a variant of power and sizes available. New for 2023, featuring a brand new custom tooled basket for increased excursion on the low bass and an even wider foam surround to cope with this excursion! This is paired with our brand new custom tooled 2 piece dustcap giving us a unique subwoofer!

If pushing the limits of excursion and SPL is what you want to achieve, then our Xtreme Series subwoofers are the right tool for the job.



EDGE

XTREME SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- QUAD 10" BLACK NOMEK SPIDERS
- TRIPLE Y35 FERRITE MAGNETS
- USA MADE 4 LAYER BLACK ALUMINIUM VOICE COIL



Model	EDX10D2-E3	EDX12D2-E3	EDX15D2-E3
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - dual stitched	Big roll foam - dual stitched	Big roll foam - dual stitched
Dustcap	Custom tooled IMPP	Custom tooled IMPP	Custom tooled IMPP
Voice Coil Former	3" Black Aluminium	3" Black Aluminium	3" Black Aluminium
Spider	2pcs Black PC	4pcs Black NOMEK	4pcs Black NOMEK
Gasket	Rubber	Rubber	Rubber
Top Plate	8mm Black anodized	15mm Black anodized	15mm Black anodized
T-Yoke	10mm Black anodized flat	15mm Black anodized flat	25mm Black anodized flat
Terminal / Wire	Spring loaded connectors	Spring loaded connectors	Spring loaded connectors
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω
RMS Power	1500 watts	2000 watts	2250 watts
Magnet	190mm x 95mm x 20mm 3pcs	190mm x 95mm x 20mm 3pcs	190mm x 95mm x 20mm 3pcs

XTREME SERIES

XTREME SERIES PRO AUDIO ENCLOSURES

The Xtreme Series Pro Box takes the full range pro speaker enclosure to the next level.

Loaded with our brand new EDXPRO6QB-E2 concentric square pro audio driver, we achieve 22% greater cone area and therefore higher SPL than any 6 inch enclosure on the market without having to increase cabinet size.

The EDXPRO6QB-E2 features a concentrically mounted PEI dome tweeter enabling it to deliver a full range output without needing any additional high frequency drivers.

The addition of the Pro box gives full range stereo sound at high volume to any system.

Perfect for in vehicle and out of vehicle applications.



EDGE

XTREME SERIES



FEATURES

- FULL RANGE PRO AUDIO ENCLOSURE
- ALL NEW EDXPRO6QB E2 CONCENTRIC DRIVER
- DUAL PORTED ENCLOSURE
- DUAL INPUT WITH 2 X 2 OHM TERMINALS
- 3000 WATTS MAX POWER



Model	EDXPROBOX-E2
Driver	EDXPRO6QB-E2
RMS Power	1500 watts
Peak Power	3000 watts
Impedance	2 Ohms
Dimensions (H x W x D)	160mm (6.3") x 900mm (35.4") x 248mm (9.8")
Frequency Response	150Hz - 20kHz
Recommended Amplifier	EDS500.2FD-E0

UNLIMITED SERIES

UNLIMITED SERIES PRO AUDIO MIDRANGE

The all-new Unlimited Series Pro audio midrange drivers are the most powerful speakers ever to feature in the EDGE range.

Built from the ground up without compromise, the Unlimited Series Pro audio midrange drivers deliver all of the sound you've come to expect from EDGE, only louder.

Featuring the largest motor of any Pro audio midrange, the Unlimited Series deliver world beating quality and ultra high efficiency of up to 100dB.

The massive 48oz magnet puts some subwoofers to shame and drives the Unlimited Series Pro audio midrange drivers to insane volume levels while keeping rock solid control of the cone and moving parts.

For those looking for the ultimate pro audio speakers, you've just found them.

EDGE

UNLIMITED
PRO



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- OVERSIZED MOTOR DESIGNED USING FINITE ELEMENT METHOD MAGNETICS
- EVA GASKET



Model	EDUPRO6-E3	EDUPRO8-E3
Type	Pro Audio Midwoofer	Pro Audio Midwoofer
Speaker Size	6.5" (168mm)	8" (208mm)
RMS Power	400 watts	450 watts
Peak Power	800 watts	900 watts
Sensitivity	99dB	100dB
Frequency Response	110Hz - 12kHz	80Hz - 9.5kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2.6" (70mm)	3.4" (86mm)
Mounting Diameter	5.7" (145mm)	7.2" (182mm)
Recommended Amplifier	EDX800.4FD-E0	EDX800.4FD-E0

UNLIMITED SERIES

UNLIMITED SERIES SUBWOOFERS

Introducing from EDGE, the brand new Unlimited Series competition grade subwoofers.

The EDU subwoofers feature a massive triple stacked Ferrite motor with extended top plate and T yolk design for extended woofer excursion and control. This magnet structure is enhanced by our unique "Heat Raptor". The Heat Raptor is a unique heat-sink concept which draws heat away from the magnet into the alloy fins, allowing the magnet and voice coil to stay much cooler during playback which in turn increases the performance of the subwoofer.

The soft parts of the subwoofer also feature some unique additions in our EDGE subwoofer range.

The EDU subwoofer has quad layered poly cotton spiders with dual woven tinsel leads for high levels of excursion control, paired with a 4 inch, 8 layer flat wound USA made voice coil with up to 5000 watts power handling.

The cone is a non pressed paper cone enhanced with Kevlar for additional strength and paired with a full carbon dustcap for extra rigidity. Finished with our ribbed surround which gives greater excursion control and no deformation of the surround when pushed to extremes.



EDGE

UNLIMITED



FEATURES

- NON PRESSED PAPER CONE WITH KEVLAR FIBRES
- HIGH ROLL RIBBED FOAM SURROUND
- QUAD BLACK POLY COTTON SPIDERS
- TRIPLE STACKED FERRITE MAGNETS
- 4" BLACK ALUMINIUM VOICE COIL
- CARBON FIBRE DUSTCAP
- HEAT RAPTOR T-YOKE HEATSINK
- 10AWG CABLE



Model	EDU12SPL-E2	EDU15SPL-E2	EDU18SPL-E2
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	High roll foam - ribbed	High roll foam - ribbed	High roll foam - ribbed
Dustcap	Carbon Fibre	Carbon Fibre	Carbon Fibre
Voice Coil	65mm Aluminium winding	65mm Aluminium winding	65mm Aluminium winding
Spider	4pcs black PC	4pcs black PC	4pcs black PC
Gasket	Rubber	Rubber	Rubber
Top Plate	25mm Black anodized	25mm Black anodized	25mm Black anodized
Terminal / Wire	10awg cable	10awg cable	10awg cable
Impedance	Dual 0.7Ω	Dual 0.7Ω	Dual 0.7Ω
RMS Power	5000 watts	5000 watts	5000 watts
Peak Power	10,000 watts	10,000 watts	10,000 watts
Magnet	280mm x 25mm 3pcs 612oz	280mm x 25mm 3pcs 612oz	280mm x 25mm 3pcs 612oz
Recommended Amplifier	EDX5000.1FD-E9	EDX5000.1FD-E9	EDX5000.1FD-E9

BEST

GOOD

COAXIAL

STREET SERIES



EDS55-E1	EDS6-E1	EDS69-E1
Coaxial	Coaxial	Coaxial
2-Way	2-Way	3-Way
Size: 5.25"	Size: 6.5"	Size: 6x9"
90 watts RMS	100 watts RMS	160 watts RMS
180 watts PEAK	200 watts PEAK	320 watts PEAK
Freq:80Hz-20kHz	Freq: 65Hz-20kHz	Freq: 45Hz-20kHz
4Ω	4Ω	4Ω
MT Depth: 46mm	MT Depth: 61mm	MT Depth: 79mm
MT Dia: 112mm	MT Dia: 142mm	MT Dia: 145x216mm

DBX SERIES



EDBX4-E1	EDBX5-E1	EDBX6-E1	EDBX69-E1
Coaxial	Coaxial	Coaxial	Coaxial
3-way	3-way	3-way	3-way
Size: 4"	Size: 5.25"	Size: 6.5"	Size: 6x9"
60 watts RMS	75 watts RMS	150 watts RMS	150 watts RMS
120 watts PEAK	150 watts PEAK	300 watts PEAK	300 watts PEAK
Freq:100Hz-20kHz	Freq:80Hz-20kHz	Freq:65Hz-20kHz	Freq:45Hz-20kHz
4Ω	4Ω	4Ω	4Ω
MT Depth: 43mm	MT Depth: 50mm	MT Depth: 53mm	MT Depth: 79mm
MT Dia: 94mm	MT Dia: 117mm	MT Dia: 41mm	MT Dia: 145x216mm

DB SERIES



EDB5-E1	EDB6-E1
Coaxial	Coaxial
2-way	2-way
Size: 5.25"	Size: 6.5"
50 watts RMS	60 watts RMS
100 watts PEAK	120 watts PEAK
Freq:80Hz-20kHz	Freq:65Hz-20kHz
4Ω	4Ω
MT Depth: 50mm	MT Depth: 53mm
MT Dia: 117mm	MT Dia: 141mm

SINCE 2008



REVOLUTIONARY CAR AUDIO

COMPONENTS

STREET SERIES



EDS6C-E1
Component
2-Way
Size: 6.5"
110 watts RMS
220 watts PEAK
Freq: 65Hz-20kHz
4Ω
MT Depth: 61mm
MT Dia: 142mm

DBX SERIES



EDBX6C-E1
Component
2-way
Size: 6x9"
150 watts RMS
300 watts PEAK
Freq:45Hz-20kHz
4Ω
MT Depth: 79mm
MT Dia: 145x216mm

TWEETERS

STREET SERIES



EDSISQTN-E1	EDSISPLTN-E1
Tweeter	Tweeter
1-Way	1-Way
Size: 1.9"	Size: 1.9"
100 watts RMS	120 watts RMS
200 watts PEAK	240 watts PEAK
Freq:1.2kHz-20kHz	Freq:1.2kHz-20kHz
4Ω	4Ω
MT Depth: 23mm	MT Depth: 23mm
MT Dia: 43mm	MT Dia: 43mm

DBX SERIES



EDBX1TN-E1
Tweeter
1-way
Size: 1.9"
70 watts RMS
140 watts PEAK
Freq:1.5Hz-25kHz
4Ω
MT Depth: 15mm
MT Dia: 44mm

DB SERIES



EDBITN-E1
Tweeter
1-way
Size: 1.8"
25 watts RMS
50 watts PEAK
Freq:2kHz-20kHz
4Ω
MT Depth: 17mm
MT Dia: 39mm

PRO MIDRANGE

UNLIMITED SERIES



EDUPRO6-E2	EDUPRO8-E2
Pro Midwoofer	Pro Midwoofer
1-way	1-way
Size: 6.5"	Size: 8"
400 watts RMS	450 watts RMS
800 watts PEAK	900 watts PEAK
100dB	99dB
Freq:80Hz-10kHz	Freq:65Hz-10kHz
4Ω	4Ω
MT Depth: 67mm	MT Depth: 82mm
MT Dia: 143mm	MT Dia: 183mm

XTREME SERIES



EDXPRO60B-E2
Pro Concentric
2-way
Size: 6.5"
300 watts RMS
600 watts PEAK
96dB
Freq:80Hz-10kHz
4Ω
MT Depth: 67mm
MT Dia: 143mm

XTREME SERIES



EDXPRO6-E1	EDXPRO8-E1
Pro Midwoofer	Pro Midwoofer
1-way	1-way
Size: 6.5"	Size: 8"
300 watts RMS	350 watts RMS
6000 watts PEAK	700 watts PEAK
96dB	98dB
Freq:80Hz-10kHz	Freq:65Hz-10kHz
4Ω	4Ω
MT Depth: 67mm	MT Depth: 82mm
MT Dia: 143mm	MT Dia: 183mm

STREET SERIES



EDSPRO6-E1	EDSPRO8-E1
Pro Midrange	Pro Midrange
1-way	1-way
Size: 6.5"	Size: 8"
200 watts RMS	225 watts RMS
400 watts PEAK	450 watts PEAK
96dB	98dB
Freq:90Hz-20kHz	Freq: 80Hz-20kHz
4Ω	4Ω
MT Depth: 64mm	MT Depth: 85mm
MT Dia: 140mm	MT Dia: 183mm

DBX MIDRANGE



EDBXPRO6-E2	EDBXPRO8-E2
Pro midrange	Pro midrange
1-way	1-way
Size: 6.5"	Size: 8"
175watts RMS	200 watts RMS
350 watts PEAK	400 watts PEAK
98dB	98dB
Freq:125Hz-10kHz	Freq:100Hz-10kHz
4Ω	4Ω
MT Depth: 78mm	MT Depth: 91mm
MT Dia: 145mm	MT Dia: 187mm

DBX WIDEBAND



EDBXPRO6W-E0	EDBXPRO69W-E9
Pro Wideband	Pro Wideband
1-way	1-way
Size: 6.5"	Size: 6" x 9"
150 watts RMS	150 watts RMS
300 watts PEAK	300 watts PEAK
90dB	94dB
Freq:100Hz-20kHz	Freq: 55Hz-20kHz
4Ω	4Ω
MT Depth: 61mm	MT Depth: 91mm
MT Dia: 140mm	MT Dia: 145x216mm

DB SERIES



EDBPRO6-E3	EDBPRO8-E3	EDBPRO10-E3
Pro Midrange	Pro Midrange	Pro Midrange
1-way	1-way	1-way
Size: 6.5"	Size: 8"	Size: 10"
150 watts RMS	175 watts RMS	200 watts RMS
300 watts PEAK	350 watts PEAK	400 watts PEAK
98dB	98dB	99dB
Freq:125Hz-10.5kHz	Freq:100Hz-9kHz	Freq:70Hz-8.5kHz
4Ω	4Ω	4Ω
MT Depth: 75mm	MT Depth: 85mm	MT Depth: 103mm
MT Dia: 145mm	MT Dia: 186mm	MT Dia: 237mm

PRO TWEETERS AMPLIFIERS

UNLIMITED SERIES



EDUPRO4T-E2
Compression Driver
1-way
Size: 4.5"
150 watts RMS
300 watts PEAK
Freq: 1.5kHz-20kHz
105dB
8 Ω
MT Depth: 67mm
MT Dia: 90mm

XTREME SERIES




EDPRO6ST-E3
Driver
1-way
Size: 6.5"
80 watts RMS
240 watts PEAK
Freq: 1.2kHz-20kHz
105dB
6.6 Ω
MT Depth: 95mm
MT Dia: 135mm

STREET SERIES



EDPRO22T-E3
Pro Audio Tweeter
1-way
Size: 2.3"
100 watts RMS
200 watts PEAK
Freq: 2kHz-20kHz
106dB
4Ω
MT Depth: 39mm
MT Dia: 43mm

DBX SERIES



EDBXPRO38T-E0
Pro Audio Tweeter
1-way
Size: 3.7"
75 watts RMS
150 watts PEAK
Freq: 2kHz-20kHz
105dB
4Ω
MT Depth: 28mm
MT Dia: 73mm

DB SERIES



EDBPRO36T-E1
Pro Audio Tweeter
1-way
Size: 3.8"
80 watts RMS
160 watts PEAK
Freq: 2kHz-20kHz
103dB
4Ω
MT Depth: 39mm
MT Dia: 80mm

EDBPRO37T-E0
Pro Audio Tweeter
1-way
Size: 3.7"
75 watts RMS
150 watts PEAK
Freq: 2kHz-20kHz
102dB
4Ω
MT Depth: 28mm
MT Dia: 73mm

XTREME SERIES



EDX1800.2FD-E0	EDX800.4FD-E0	EDX5000.1FD-E0
2 channel	4 channel	Monoblock
2.5" x 10.4" x 9.1"	2.5" x 10.4" x 9.1"	2.5" x 10.4" x 9.1"
2 x 850w 4Ω	4 x 310w 4Ω	1 x 1800w 1Ω
2 x 1250w 2Ω	4 x 500w 2Ω	1 x 2500w 2Ω
2 x 1800w 1Ω	4 x 800w 1Ω	1 x 5000w 1Ω
1 x 3600w 2Ω BR	2 x 1600w 2Ω BR	N/A
2000w MAX	6400w MAX	10,000w MAX
Freq: 20Hz-20kHz	Freq: 20Hz-20kHz	Freq: 15Hz-20kHz
LP / HP	LP / HP / FLAT	LP / HP
Xover: 15Hz-15kHz	Xover: 15Hz-6kHz	Xover: 15Hz-20Hz
Class D	Class D	Class D

STREET SERIES



EDS500.2FD-E3	EDS3000.1FD-E3
2 channel	Monoblock
2.5" x 6.9" x 9.1"	2.5" x 7.2" x 9.1"
2 x 225w 4Ω	1 x 1100w 4Ω
2 x 525w 1Ω	1 x 2050w 2Ω
1 x 1050w 2Ω BR	1 x 3300w 1Ω
2100w MAX	6600w MAX
Freq: 20Hz-20kHz	Freq: 15Hz-20kHz
LP / HP	LP / HP
Xover: 15Hz-15kHz	Xover: 15Hz-20kHz
Class D	Class D

DBX SERIES



EDBX1800.D1-E1	EDBX2200.D1-E1
Monoblock	Monoblock
2" x 15" x 9"	2" x 19.3" x 9"
1 x 650w 4Ω	1 x 850w 4Ω
1 x 1200w 2Ω	1 x 1600w 2Ω
1 x 1800w 1Ω	1 x 2200w 1Ω
3600w MAX	4400w MAX
Freq: 10Hz-180Hz	Freq: 10Hz-180Hz
LP / Subsonic	LP / Subsonic
Xover: 0Hz-180Hz	Xover: 0Hz-180Hz
Class D	Class D

DBX SERIES



EDBX100.4-E3	EDBX150.4-E3	EDBX200.4-E3	EDBX350.2-E3
4 channel	4 channel	4 channel	2 channel
2.3" x 11" x 8.8"	2.3" x 12.2" x 8.8"	2.3" x 13.8" x 8.8"	2.3" x 13.8" x 8.8"
4 x 80w 4Ω	4 x 100w 4Ω	4 x 150w 4Ω	2 x 250w 4Ω
4 x 100w 2Ω	4 x 150w 2Ω	4 x 200w 2Ω	2 x 350w 2Ω
2 x 200w BR	2 x 300w BR	2 x 400w BR	1 x 700w BR
800w MAX	1200w MAX	1600w MAX	1400w MAX
Freq: 20Hz-20kHz	Freq: 20Hz-20kHz	Freq: 20Hz-20kHz	Freq: 20Hz-20kHz
LP / HP / Flat	LP / HP / Flat	LP / HP / Flat	LP / HP / Flat
Xover: 30Hz-250Hz	Xover: 30Hz-250Hz	Xover: 30Hz-250Hz	Xover: 30Hz-250Hz
Class AB	Class AB	Class AB	Class AB

DB SERIES



EDB500.1-E9	EDB1000.1-E9	EDB80.2LITE-E2	EDB80.4LITE-E2
Monoblock	Monoblock	2 Channel	4 Channel
1.8" x 7.3" x 8.1"	1.8" x 10.8" x 8.1"	2.3" x 7" x 9.1"	2.3" x 7" x 12.7"
1 x 200w 4Ω	1 x 400w 4Ω	2x60w/1x160w 4Ω	4x60w/2x160w 4Ω
1 x 350w 2Ω	1 x 650w 2Ω	2 x 80w 2Ω	4 x 80w 2Ω
1 x 500w 1Ω	1 x 1000w 1Ω	N/A	N/A
1000w MAX	2000w MAX	320w MAX	640w MAX
Freq: 15Hz-250Hz	Freq: 15Hz-250Hz	Freq: 20Hz-20kHz	Freq: 20Hz-20kHz
LP / Subsonic	LP / Subsonic	HP/LP/FLAT	HP/LP/FLAT
Xover: 15Hz-250Hz	Xover: 5Hz-250Hz	Xover: 50Hz-4kHz	Xover: 50Hz-4kHz
Class D	Class D	Class AB	Class AB

ENCLOSURES

XTREME SERIES



EDXPROBOX-E2
EDXPROBO6B
1500W / 3000W
2Ω
6.3" x 35.4" x 9.8"
Freq: 150Hz-20kHz

DB SERIES



EDBPROBOX-E9	EDBPROBOX6-E2	EDBPROBOX8-E2
EDPRO36BT	EDPRO36BT	EDPRO36BT
EDBPRO6	EDBPRO6	EDBPRO8
760W / 1520W	760W / 1520W	860W / 1720W
Dual 2Ω	Dual 2Ω	Dual 2Ω
6.3" x 35.4" x 9.8"	7.3" x 34.1" x 10.7"	7.8" x 34.1" x 10.7"
Freq: 150Hz-20kHz	Freq: 120Hz-20kHz	Freq: 100Hz-20kHz

DBX SERIES



EDBX10A-E2	EDBX12A-E2	EDBX12TA-E2
EDBX10	EDBX12	2 x EDBX12
250W / 750W	300W / 900W	600W / 1800W
Dual 2Ω	Dual 2Ω	Dual 2Ω
6.3" x 35.4" x 9.8"	7.3" x 34.1" x 10.7"	7.8" x 34.1" x 10.7"
Freq: 150Hz-20kHz	Freq: 120Hz-20kHz	Freq: 100Hz-20kHz

DBX SERIES



EDBX10A-E0
EDBX10S
Shallow enclosure
180W / 360W
2.9" x 10.2" x 13.6"
2nd Order

DB SERIES



EDB10A-E0	EDB12A-E0	EDB12TA-E0
EDS10A	EDS12A	EDS12A x 2
250W / 750W	300W / 900W	600W / 1800W
4Ω	4Ω	4Ω
11.8" x 14.4" x 15.7"	13.3" x 16.1" x 16.3"	13.3" x 29.1" x 16.3"
Bass reflex	Bass reflex	Bass reflex

DB SERIES



FLATPACK10	FLATPACK12
10" Sub Enclosure	12" Sub Enclosure
Flatpack	Flatpack
1cuft	1.25cuft
Acoustic suspension	Acoustic suspension

SUBWOOFERS

UNLIMITED SERIES



EDU15SPL-E2	EDU18SPL-E2
Size: 15"	Size: 18"
5000W/10,000W	5000W/10,000W
Ribbed surround	Ribbed surround
Freq: 20Hz-850Hz	Freq: 20Hz-850Hz
Dual 0.7Ω	Dual 0.7Ω
4" 4 layer	4" 4 layer
612oz	612oz
MT Depth: 265mm	MT Depth: 297mm
MT Dia: 352mm	MT Dia: 418mm

XTREME SERIES



EDX10D2-E3	EDX12D2-E3	EDX15D2-E3
Size: 10"	Size: 12"	Size: 15"
1500W/3000W	1750W/3500W	2000W/4000W
83dB	84dB	87dB
Freq: 30Hz - 1kHz	Freq: 25Hz - 850Hz	Freq: 20Hz - 850Hz
Dual 2Ω	Dual 2Ω	Dual 2Ω
3" 4 layer	3" 4 layer	3" 4 layer
375oz	375oz	375oz
MT Depth: 170mm	MT Depth: 196mm	MT Depth: 234mm
MT Dia: 234mm	MT Dia: 286mm	MT Dia: 352mm

STREET SERIES



EDPI25SPL-E3	EDS12D2-E3	EDS15D2-E3	EDS18D2-E3
Size: 12"	Size: 12"	Size: 15"	Size: 18"
1500W/3000W	1400W/2800W	1600W/3200W	1800W/3600W
84dB	83dB	85dB	87dB
Freq: 25Hz - 850Hz	Freq: 25Hz - 850Hz	Freq: 20Hz - 850Hz	Freq: 20Hz - 850Hz
Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
3" 4 layer	3" 4 layer	3" 4 layer	3" 4 layer
132oz	120oz	150oz	150oz
MT Depth: 175mm	MT Depth: 172mm	MT Depth: 206mm	MT Depth: 235mm
MT Dia: 283mm	MT Dia: 287mm	MT Dia: 360mm	MT Dia: 427mm

DBX SERIES



EDBX12D2SPL-E3	EDBX15D2SPL-E3
Size: 12"	Size: 15"
1000W/2000W	1200W/2400W
84dB	86dB
Freq: 25Hz - 850Hz	Freq: 20Hz - 850Hz
Dual 2Ω	Dual 2Ω
2.5" 4 layer	2.5" 4 layer
100oz	100oz
MT Depth: 170mm	MT Depth: 188mm
MT Dia: 284mm	MT Dia: 358mm

DB SERIES



EDB12D2LITE-E0	EDB10D2-E0	EDB12D2-E0	EDB15D2-E0
Size: 12"	Size: 10"	Size: 12"	Size: 15"
300W/600W	500W/1000W	600W/1200W	750W/1500W
87dB	84dB	88dB	86dB
Freq: 25Hz - 850Hz	Freq: 30Hz - 1kHz	Freq: 25Hz - 850Hz	Freq: 20Hz - 450Hz
Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
2" 4 layer	2" 4 layer	2" 4 layer	2" 4 layer
40oz	55oz	55oz	75oz
MT Depth: 140mm	MT Depth: 135mm	MT Depth: 146mm	MT Depth: 189mm
MT Dia: 283mm	MT Dia: 232mm	MT Dia: 275mm	MT Dia: 347mm

DB SERIES



EDGESPL12	EDGESPL12 TWIN
12" Sub Enclosure	12" Twin Sub Enclosure
Prebuilt	Prebuilt
2cuft	4cuft
Bass Reflex	Bass Reflex

COMPATIBLE WITH ALL EDGE SUBWOOFERS

PRODUCT RANGES

CONNECT

UNLIMITED SERIES



When only the best will do EDGE Unlimited is the only range for you. Our most uncompromising range encompassing all of the latest technology and design.

We are able to offer the biggest, strongest, loudest and most powerful products we have ever produced. This range is not for the faint of heart and is used in competition winning installs around the world! When you want to be a winner choose EDGE Unlimited.

LEVEL 5



EDGE

Car AUDIO
REVOLUTIONARY CAR AUDIO

XTREME SERIES



Want to be the loudest on the street?
Want to push the limits?

The Xtreme series combines some of the most powerful subwoofers, amplifiers and speakers in one range; we're truly living up to our premise of producing revolutionary car audio.

Want to be seen and heard?
Choose EDGE Xtreme.

LEVEL 4

STREET SERIES



The Street series is where it all began!

In 2007 we began setting the streets on fire with the EDGE brand and the current incarnation of the Street series is stronger than ever.

In this range we start to push the boundaries of car audio with high levels of Pro audio, trunk rattling subwoofers, alongside component and coaxial speakers to suit all needs.

LEVEL 3

DBX SERIES



When the DB series from EDGE just doesn't feed your need for extreme audio, the DBX series pushes the boundaries of the best value range on the market!

The DBX series offers an extreme take on our DB series, these are high powered subwoofers, super loud Pro audio speakers, tweeters and a brilliant range of amplifiers to power them all.

When you want to push your budget go DBX.

LEVEL 2


DB SERIES



The EDGE DB Series was designed to offer the best bang for buck products on the market.

With subwoofers, Coaxial speakers, Pro audio speakers and amplifiers, the DB series provides everything you need to be the loudest on the streets.

LEVEL 1

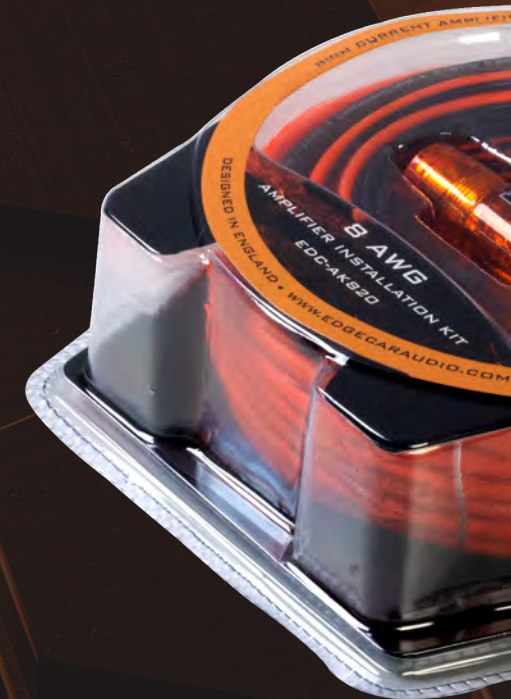

The EDGE CONNECT range of accessories has been designed and developed to ensure that your speakers. Running EDGE's high quality car audio equipment using any accessories will not compromise your products performance and not allow it to deliver its full potential.

Your audio equipment will only ever be as good as its weakest link, so when high quality connectivity and installation accessories are used, this in turn will ensure that all EDGE CONNECT accessories have been developed to maximise the performance of your audio system.

Ease of installation is at the forefront of the development of the EDGE CONNECT range. Ergonomically tooled RCA's, high flex silicone jackets on all cables, multi-pin connectors ensure our range is perfect for any scenario.

ECT



Developed to be the critical link between your source, amplifier and anything other than the EDGE CONNECT range of accessories will seriously compromise maximum potential.

Don't let this be your install accessories. You should always ensure high quality will lead to better sound, better fitting and a more secure and solid installation. The performance of EDGE car audio products.

Edge Connect products and innovative design is the philosophy of the range. Multi-way splitters and distribution as well as fitting and installation accessories.



Complete wiring kits



EDC-AK820

- 8AWG complete wiring kit with 2 channel RCA

EDC-AK840

- 8AWG complete wiring kit with 4 channel RCA

EDC-AK440

- 4AWG complete wiring kit with 4 channel RCA

EDC-AK447

- 4AWG complete OFC wiring kit with 4 channel RCA

Speaker cable kits

EDC-SK167

- 10m 16AWG speaker cable kit with connectors

EDC-AK140

- 10m 14AWG speaker cable kit with connectors

Interconnects



EDC-RB502

- 5m Stereo OFC RCA

EDC-YB200

- 2F-1M OFC RCA Splitter

EDC-YB210

- 1F-2M OFC RCA Splitter



EDC-RS502

- 5m Stereo Street series shielded OFC RCA

Battery terminals



EDC-BT107

- 8AWG Positive battery terminal

EDC-BT007

- 8AWG Negative battery terminal

Cable reels



EDC-PC800

- 50m 8AWG positive/negative cable

EDC-PC400

- 25m 4AWG positive/negative cable

EDC-PC107

- 15m 0AWG positive/negative cable



EDC-SW160

- 100m 16AWG speaker cable

EDC-SW140

- 75m 14AWG speaker cable

EDC-SW120

- 50m 12AWG speaker cable

EDC-SW127

- 50m 12AWG OFC speaker cable

Power distribution / fuseholders



EDC-DB024

- 2 x 0 / 4AWG + 2 x 4 / 8 AWG non fused distribution

EDC-DB024

- 3 x 0 / 4AWG non fused distribution



EDC-HA007

- ANL Fuseholder

EDC-HM002

- Mini ANL Fuseholder

Line convertor

EDC-HL108

- 2 Channel high to low line output convertor



EDGE

EDGECARAUDIO.COM
FACEBOOK.COM / EDGEAUDIO
INSTAGRAM.COM / EDGE_CARAUDIO