

CS 200 S4

COMP SUBWOOFER

300 W



Optional


TECHNICAL SPECIFICATIONS

Component	Subwoofer	
Size		
Woofers	mm (in.)	200 (8)
Voice Coil Ø		
Subwoofer	mm (in.)	35 (1.38)
Power Handling		
	W peak	300
	W continuous	150
Impedance	Ω	4
Frequency Response	Hz	-
Subwoofer Magnet size D x d x h	mm (in.)	120 x 50 x 28 (4.72 x 1.97 x 1.1)
Weight of one component	kg (lb.)	2,87 (1.30)
Subwoofer Magnet	High density flux ferrite	
Cone	Polypropylene	
Xmech	mm (in.)	11,5 (0.45)

ELECTRO-ACOUSTIC PARAMETERS

D	mm	172
Xmax	mm	9
Re	Ω	3,3
Fs	Hz	40
Le	mH	1,7
Vas	l	13,7
Mms	g	76,8
Cms	mm/N	0,21
BL	T•m	10,6
Qts		0,52
Qes		0,58
Qms		5
Spl	dB	84

1. Electroacoustic design optimized for enclosures starting from 9,6 liters.
2. Fluid dynamic optimization system that drastically reduces the acoustic distortions generated by the air compression at high excursions.
3. Polypropylene cone and dust cap geometry engineered through FEM simulations for low frequency distortion reduction.
4. 35 mm 4 Ω voice coil wound on six layers of pure copper on a high thermal resistance glass fiber support.
5. Magnetic group geometry optimized with proprietary software for high undistorted SPL at high excursions.
6. Ideal for use in custom boxes that can be shaped around the subwoofer thanks to its compact size and lack of the decompression hole.
7. Terminal block featuring solid push contacts that accept cables up to 8 AWG to offer low wiring resistance and maximum ease of connection even in installations with multiple subwoofers.
8. Rubber protection of the magnetic assembly and high-strength ABS plastic gasket allowing the application of the optional grille for an elegant finish.

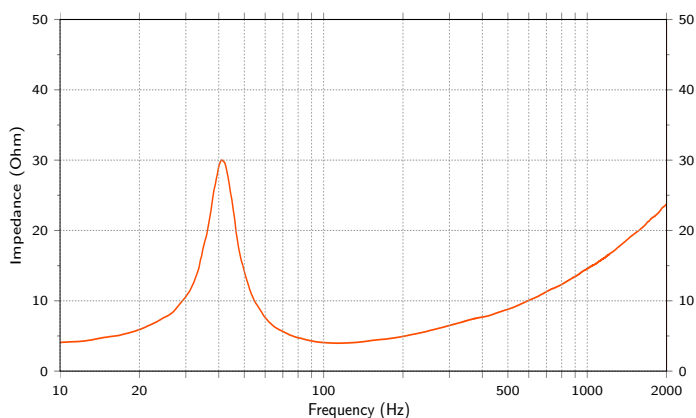

A	213 mm	8.39 in.
B	177 mm	6.97 in.
C	114 mm	4.49 in.
D	101 mm	3.98 in.
E	201 mm	7.92 in.
F	24 mm	0.95 in.

